

MOVEABLE GLASS WALL TECHNICAL DATA

- Ideal for applications requiring space division, visibility, and security.
- Used in banks, office lobbies, conference areas, interior storefronts, and arena skyboxes.
- Clean look of secure, yet easily moveable glass partitioning.
- Move on dual preprogrammed carriers incorporated into the Smart Track™ suspension technology.
- Interlocking panels with keyed floor bolts, available in a variety of metal finishes and glass options.

Modernfold Model

Compactline	4.88-inch (124 mm) Contoured Top and Bottom Rails
-------------	---

This specification along with product information and model details can be downloaded from www.modernfold.com.

PART 1 – GENERAL

1.1 RELATED DOCUMENTS

- A. Drawings and general provisions of the Contract, including General and Supplementary Conditions and Division 01 Specification Sections, apply to this Section.

1.2 SUMMARY

- A. This Section includes the following:
1. Manually operated, individual glass panel partitions.
- B. Related Sections include the following:
1. Division 03 Sections for concrete tolerances required.
 2. Division 05 Sections for primary structural support, including pre-punching of support members by structural steel supplier per glass operable partition supplier's template.
 3. Division 06 Sections for wood framing and supports and all blocking at head and jambs as required.
 4. Division 08 Sections for lock cylinders and keying requirements.
 5. Division 09 Sections for wall and ceiling framing at head and jambs.

1.3 QUALITY ASSURANCE

- A. Installer Qualifications: An experienced installer who is certified in writing by the glass operable partition manufacturer, as qualified to install the manufacturer's partition systems for work similar in material, design, and extent to that indicated for this Project.
- B. Preparation of the opening shall conform to the criteria set forth per ASTM E557 Standard Practice for Architectural Application and Installation of Operable Partitions.

1.4 SUBMITTALS

- A. Product Data: Material descriptions, construction details, finishes, installation details, and operating instructions for each type of operable glass panel partition, component, and accessory specified.
- B. Shop Drawings: Show location and extent of operable glass panel partitions. Include plans, elevations, sections, details, attachments to other construction, and accessories. Indicate dimensions, weights, conditions at openings and at storage areas, and required installation, storage, and operating clearances. Indicate location and installation requirements for hardware and track including floor tolerances required and direction of travel. Indicate blocking to be provided by others.
- C. Setting Drawings: Show imbedded items and cutouts required in other work, including support beam punching template.
- D. Samples: Color samples demonstrating full range of finishes available for selection by architect. Verification samples will be available in same thickness and material indicated for the work.

1.5 DELIVERY, STORAGE, AND HANDLING

- A. Clearly mark packages and panels with numbering systems used on Shop Drawings. Do not use permanent markings on panels.
- B. Protect panel and glazing materials during delivery, storage, and handling to comply with manufacturer's direction and as required to prevent damage to the glass and hardware.

1.6 WARRANTY

- A. Manufacturer's Special Project Warranty on Glass Panels:

MOVEABLE GLASS WALL TECHNICAL DATA

Provide written warranty signed by the manufacturer of glass operable partitions agreeing to replace those panels with manufacturing defects.

1. Manufacturing defects are defined as any defect materially obstructing vision through the glass, and mechanical failure of hardware which prevents the proper operation of the panels after appropriate installation.
2. Warranty period: Two (2) years from date of shipment.

PART 2 - PRODUCTS

2.1 MANUFACTURERS, PRODUCTS, AND OPERATION

- A. Manufacturers: Subject to compliance with requirements, provide products by one of the following:
1. Modernfold, Inc.
- B. Products: Subject to compliance with the requirements, provide one of the following products:
1. Modernfold Glass Wall Model Compactline with 4-7/8-inch (124 mm) contoured top and bottom rails.

2.2 OPERATION

- A. Manually operated and top-supported series of individual glass panels. Panels use two-piece, clamp-on top and bottom rail that fastens together from alternating sides.
1. Final closure: Select from one of the following:
 - a. Pivot panel.
 - b. Standard intermediate panel ending within storage pocket, or at face of storage pocket.

2.3 CONSTRUCTION

- A. Provide top reinforcement as required to support panel from suspension components and provide reinforcement for hardware attachment. Fabricate panels with concealed fasteners. Finished in-place partition shall be rigid, level, plumb, aligned with uniform joints and appearance; free of bow, warp, twist, deformation, and surface and finish irregularities.
- B. Dimensions: Fabricate operable glass panel partitions with manufacturer's standard panel sizes to form an assembled system of dimensions indicated on Drawings, and verified by field measurements.
1. Maximum panel width: 48-inches (1219 mm)
 2. Standard rail thickness: 1-5/8-inches (41 mm)
- C. Top and Bottom Rails: Continuous two-piece assemblies with removable end caps. Rails fasten together from alternate sides of partition allowing for field adjustment to job site conditions. Covers are furnished to facilitate installation.
- D. Bottom Rail Locking System: Engage adjacent panels by use of interlocking floor bolts to stabilize panels from movement in all directions.
1. Equip a minimum of one end panel with a brass, mortised lock allowing for cylinder and/or thumb turn operation. Round bolts engage dust-proof floor strikes for security.
 2. Pivot panels to have mortised cylinder with key and

thumb turn.

3. Intermediate panels to have interconnecting floor bolts.
 4. Lead panels to have mortised cylinder with thumb turn.
- E. Fully Framed (optional): Extruded aluminum vertical stiles measuring 7/8-inch (22 mm) × 51/64-inch (20 mm) with a minimum wall thickness of 3/32-inch (2 mm). Vertical stiles shall have an integral channel to accept vinyl seals used to create panel joints and panel interfaces. Stile shall be continuous and run the entire length of the panel between both rails covering the glass edge. Stile is applied to the glass using a two-part epoxy. Silicone-applied stiles are not acceptable.

2.4 MATERIALS

- A. Aluminum: Alloy and temper recommended by aluminum producer and finisher for type of use, corrosion resistance, and finish indicated; ASTM B221 (ASTM B221M) for extrusions; manufacturer's standard strengths and thicknesses for type of use.
- B. Glass: Compliant with safety standards specified in ANSI Z97.1 CPSC16, CFR1201, ASTM C1036, and ASTM C1048.
1. Thickness: 1/2-inch (13 mm) or 3/8-inch (10 mm); tempered.
 2. Standard Color: Clear
 - a. Other options: Bronze and Smoke Gray

2.5 PANEL FINISHES

- A. Provide top and bottom rails with one of the following finishes:
1. Clear satin anodized aluminum
 2. Satin stainless steel anodized aluminum

2.6 SUSPENSION SYSTEM

- A. G-150 Suspension System
1. Suspension Tracks: Extruded aluminum with a minimum wall thickness of 0.235-inches (6 mm). Incorporate cast aluminum or mitered intersections, switches, and curves in stacking area. Provide alignment pins for track, intersections, switches and curves insuring both fit and roller surface integrity.
 - a. Exposed track soffit: Factory-finished aluminum with white powder coat.
 2. Carriers: Two stainless steel trolleys with vinyl roller surfaces. Trolley design incorporates eight (8) wheels of varying dimensions. Automatic indexing of panels into stack area is provided by pre-programmed switches and trolleys without electrical, pneumatic, or mechanical activation.

2.7 OPTIONS

- A. Pass Doors
1. Sliding Swing Door: Top hung operating swing door, rail heights to match partition rails providing uniform appearance.
 2. Hardware
 - a. Automatic door closer

MOVEABLE GLASS WALL TECHNICAL DATA

- i. Overhead closer
- b. Push/Pull Bars
- c. Mortise Cylinder Floor Locks

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Comply with ASTM E557, operable glass partition manufacturer's written installation instructions, Drawings, and approved Shop Drawings.
- B. Install operable glass partitions and accessories after other finishing operations, including painting, have been completed.
- C. Match operable glass partitions by installing panels from marked packages in numbered sequence indicated on Shop Drawings.
- D. Broken, cracked, chipped, deformed, or unmatched panels are not acceptable.

3.2 CLEANING AND PROTECTION

- A. Clean metal and glass surfaces upon completing installation of operable glass partitions to remove dust, loose fibers, fingerprints, adhesives, and other foreign materials according to manufacturer's written instructions.
- B. Provide final protection and maintain conditions in a manner acceptable to manufacturer and Installer that insure operable glass partitions are without damage or deterioration at time of Substantial Completion.

3.3 ADJUSTING

- A. Adjust operable glass partition to operate smoothly, easily, and quietly, free from binding, warp, excessive deflection, distortion, nonalignment, misplacement, disruption, or malfunction throughout entire operational range. Lubricate hardware and other moving parts.

3.4 EXAMINATION

- A. Examine flooring, structural support, and opening, with Installer present, for compliance with requirements for installation tolerances and other conditions affecting performance of operable glass partitions. Proceed with installation only after unsatisfactory conditions have been corrected.
 - 1. Insure finished floor under operable glass partition is level ± 0.13 -inch (3 mm) in ten (10) feet (3048 mm) non-cumulative.

3.5 DEMONSTRATION


- A. Demonstrate proper operation and maintenance procedures to Owner's representative.
- B. Provide Operation and Maintenance Manual to Owner's representative.

MOVEABLE GLASS WALL TECHNICAL DATA PANEL SECTION – MODEL COMPACTLINE

	Max. System Height	Min. Panel Width	Max. Panel Width	Max. Panel Weight
Pivot Panel	*10' - 2"	2' - 0"	4' - 0"	300 lbs.
Intermediate Panel	*10' - 2"	2' - 0"	4' - 0"	300 lbs.


*Above 10'-2" up to 12'-2" consult factory. Example: Maximum Height is 10-0" with 4-0" wide panel and Maximum Width is 3'-4" with 12'-2" tall panel.

G150 Track System Direct Mount

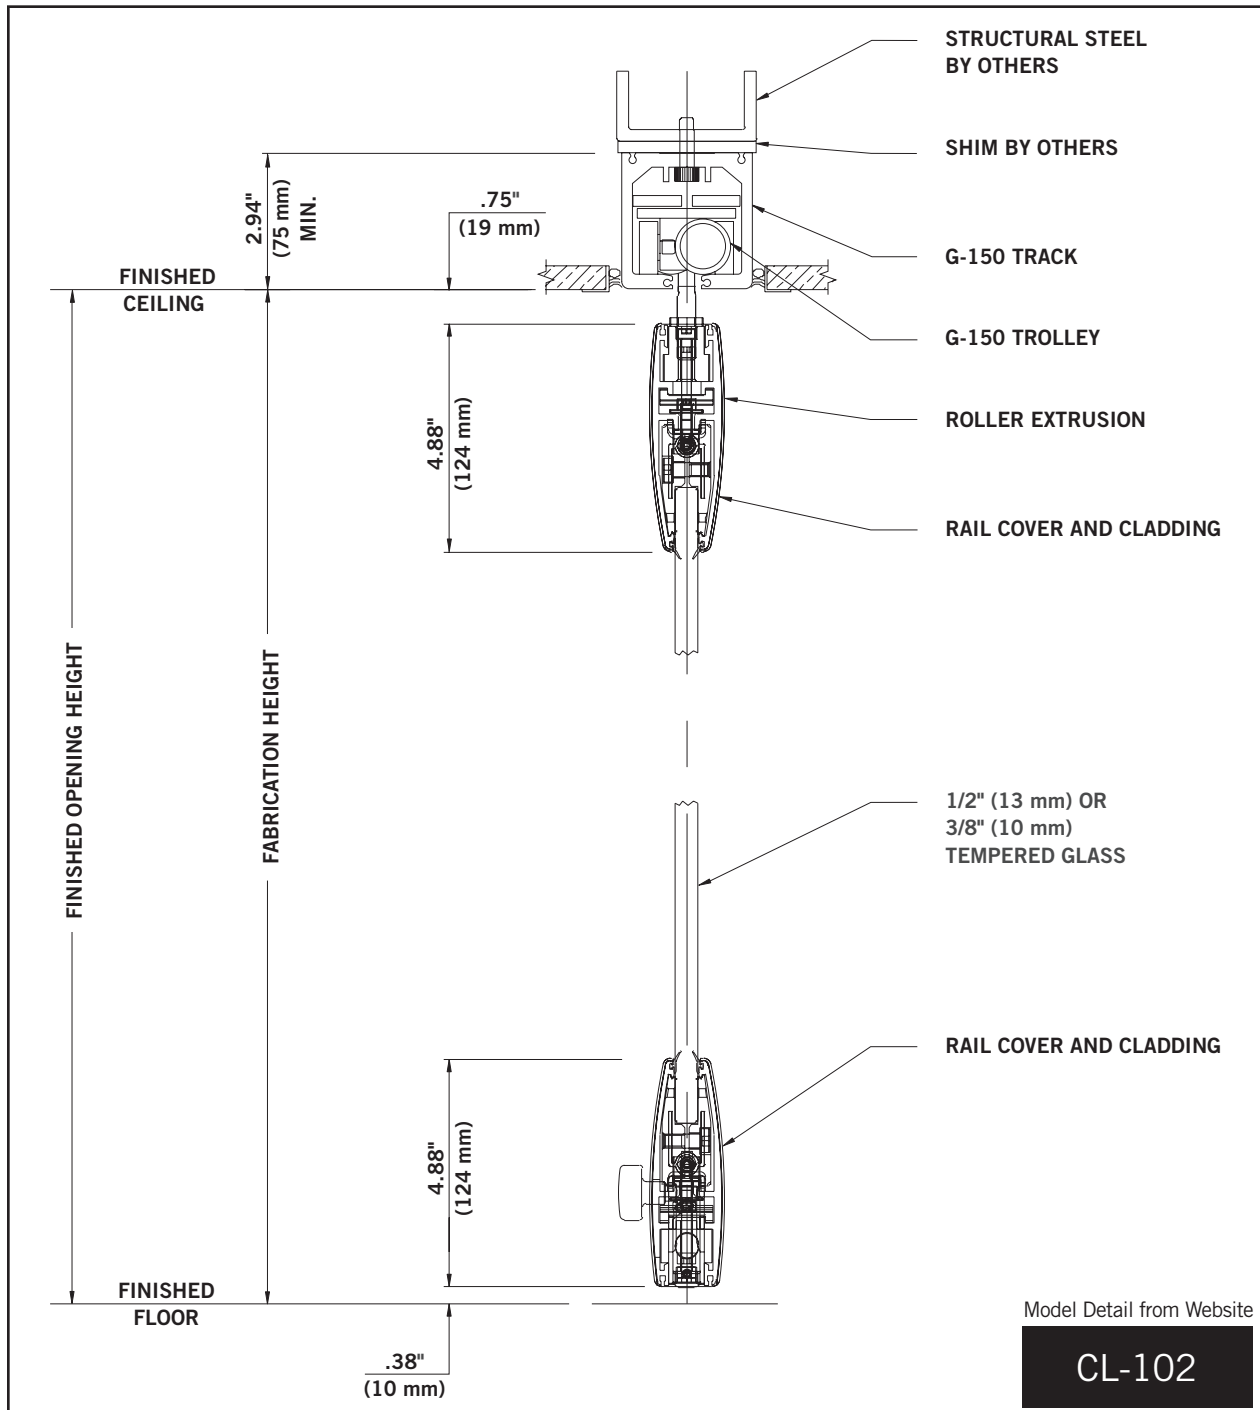

**MOVEABLE GLASS WALL TECHNICAL DATA
 PANEL SECTION – MODEL COMPACTLINE**

G-150 Track System Bracket Mount

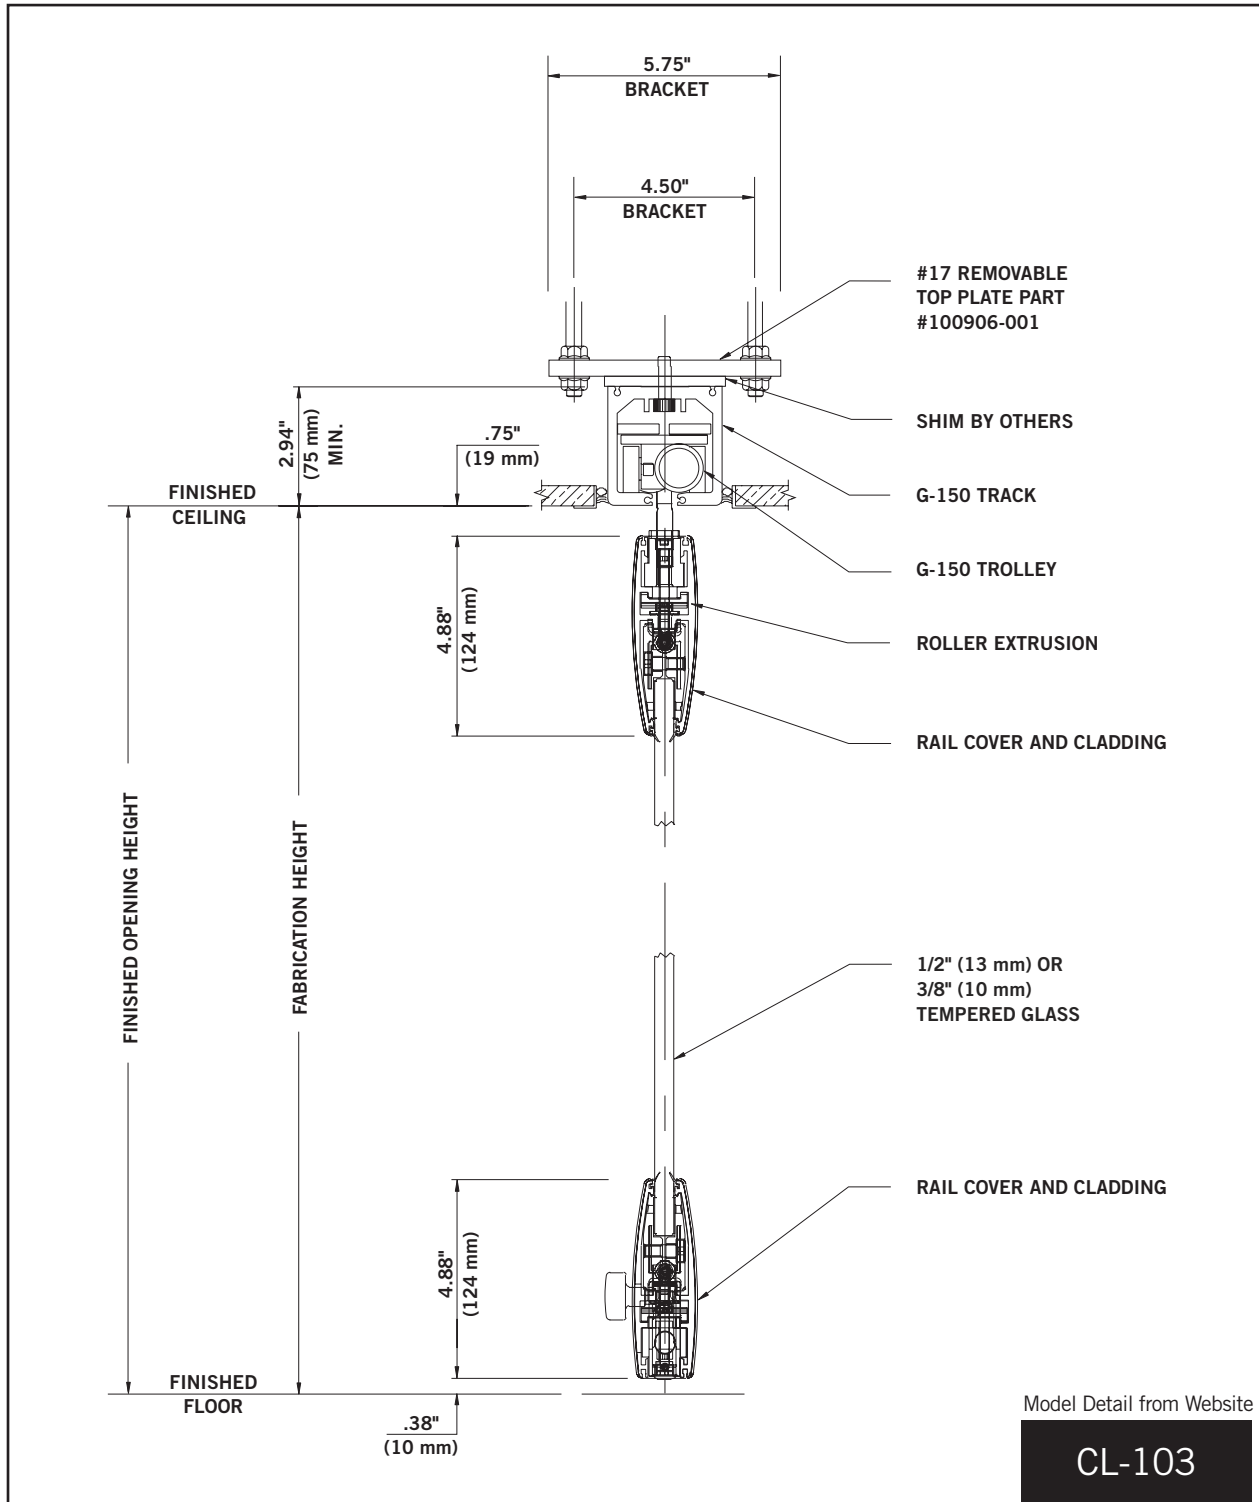


Model Detail from Website

CL-103


MOVEABLE GLASS WALL TECHNICAL DATA PANEL SECTION – MODEL COMPACTLINE

G-150 Track System Direct Mount (with Top & Bottom Seals)

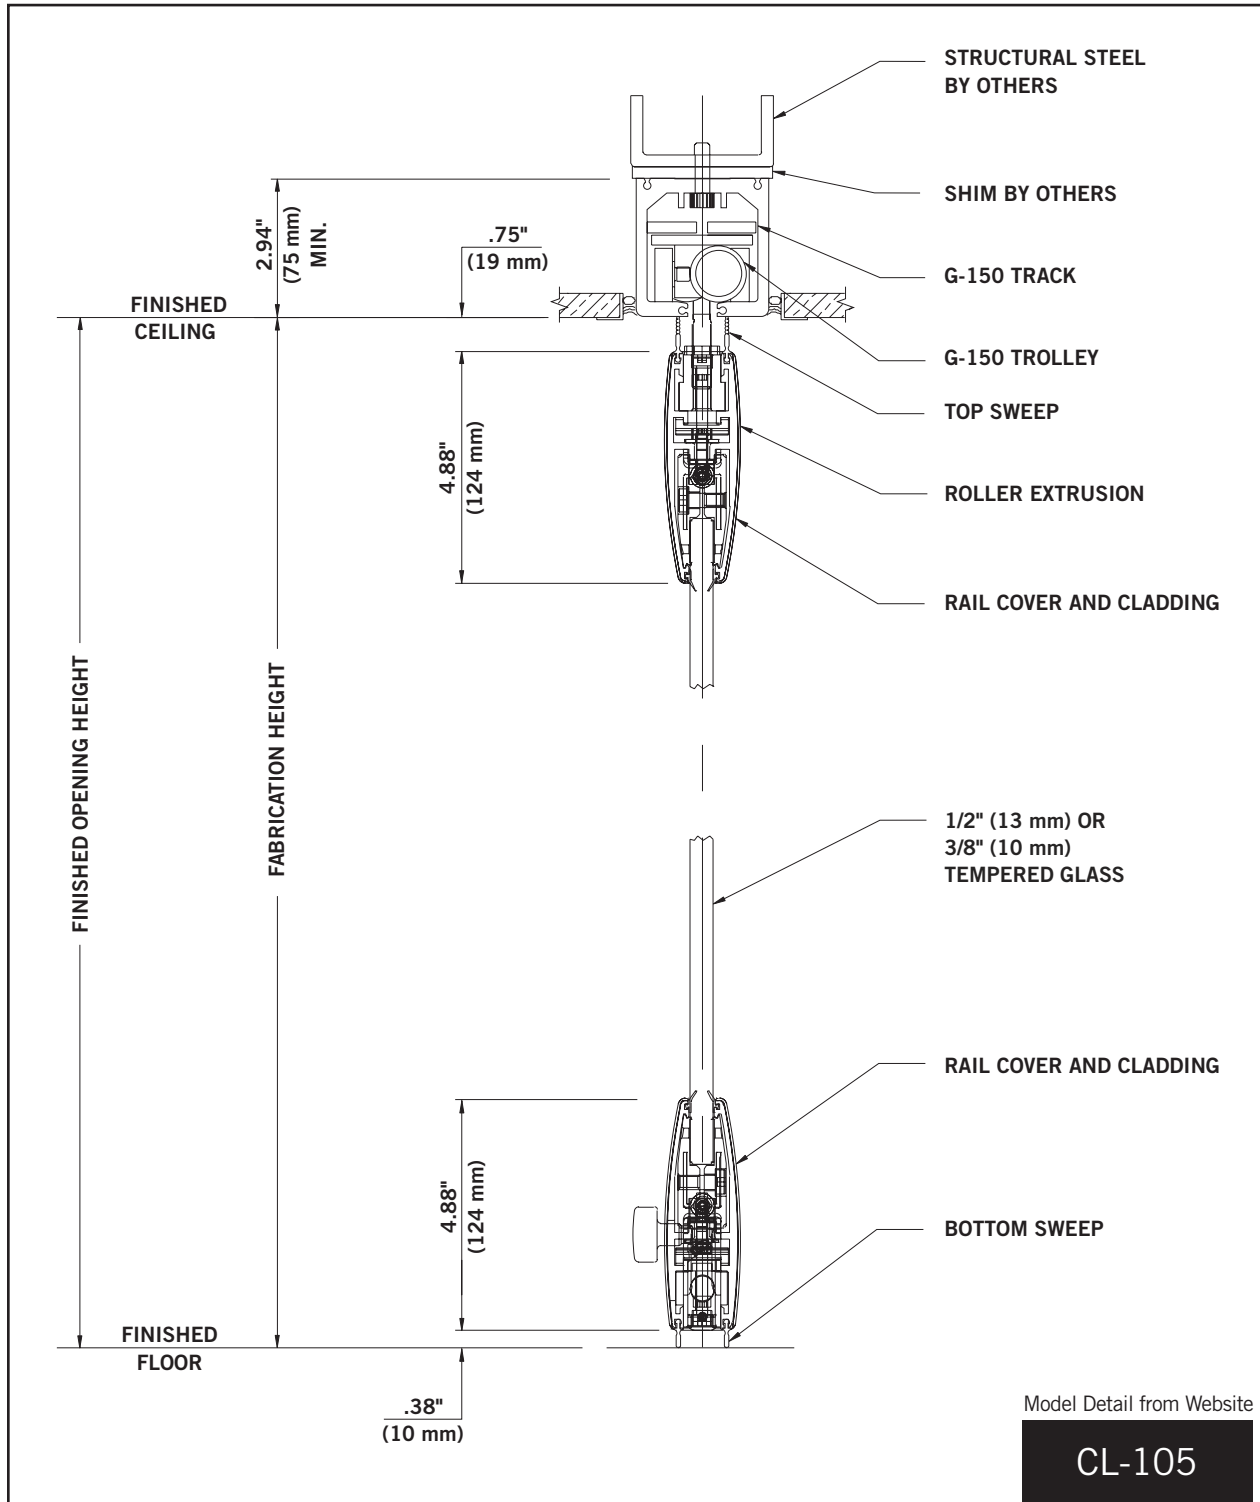


**MOVEABLE GLASS WALL TECHNICAL DATA
 PANEL SECTION – MODEL COMPACTLINE**

G-150 Track System Bracket Mount (with Top & Bottom Seals)

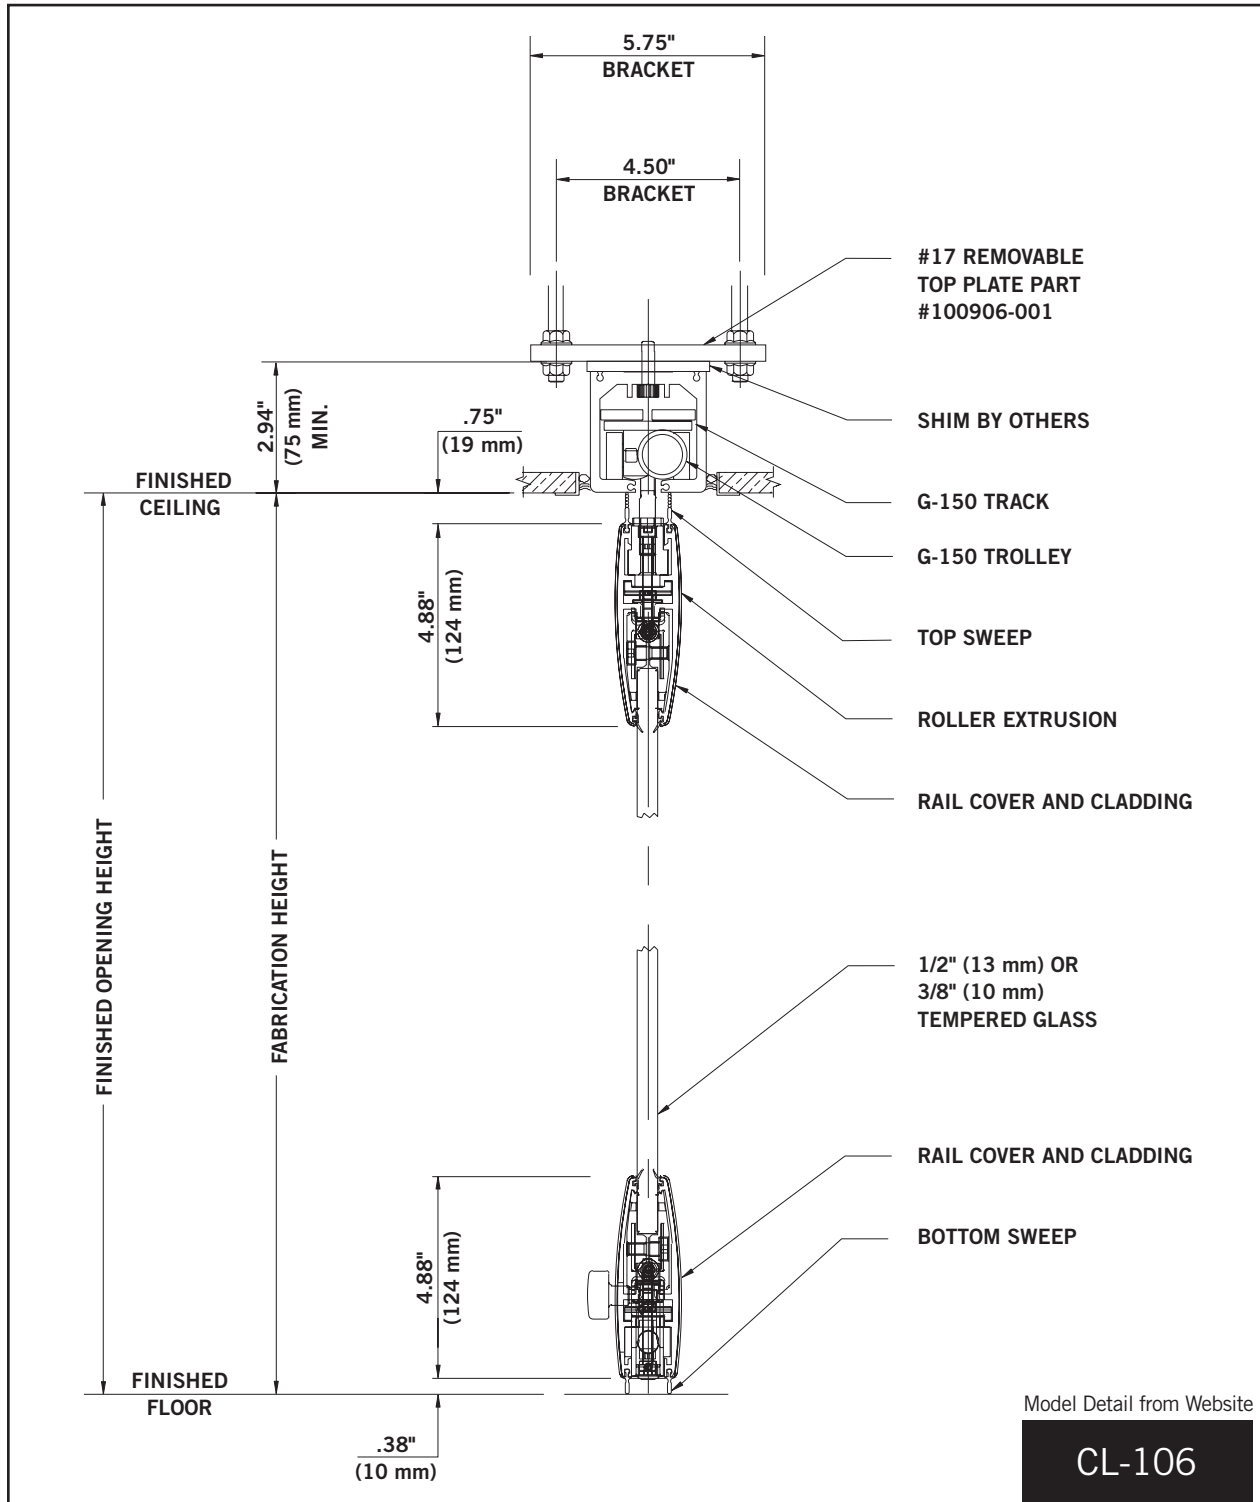


**MOVEABLE GLASS WALL TECHNICAL DATA
 SECTION THROUGH PASS DOOR WITH CONCEALED TOP CLOSER**

G-150 Track System Direct Mount

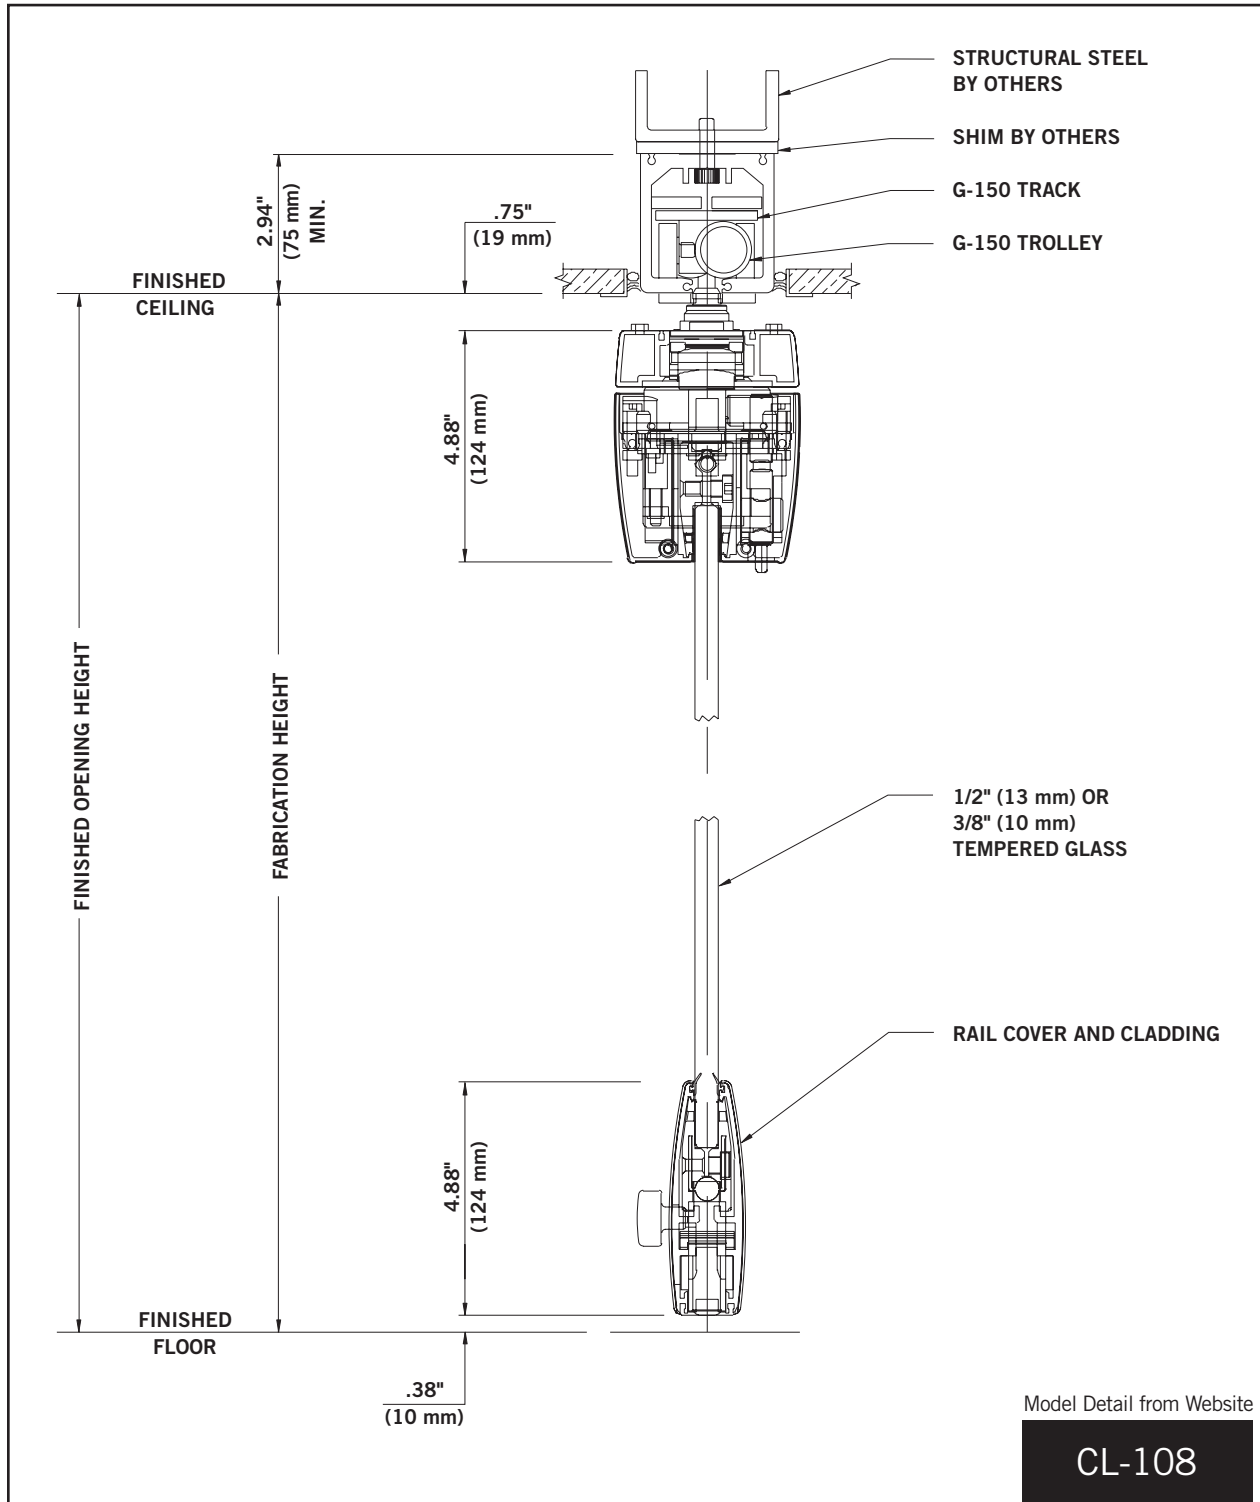

MOVEABLE GLASS WALL TECHNICAL DATA SECTION THROUGH PASS DOOR WITH CONCEALED TOP CLOSER

G-150 Track System Bracket Mount

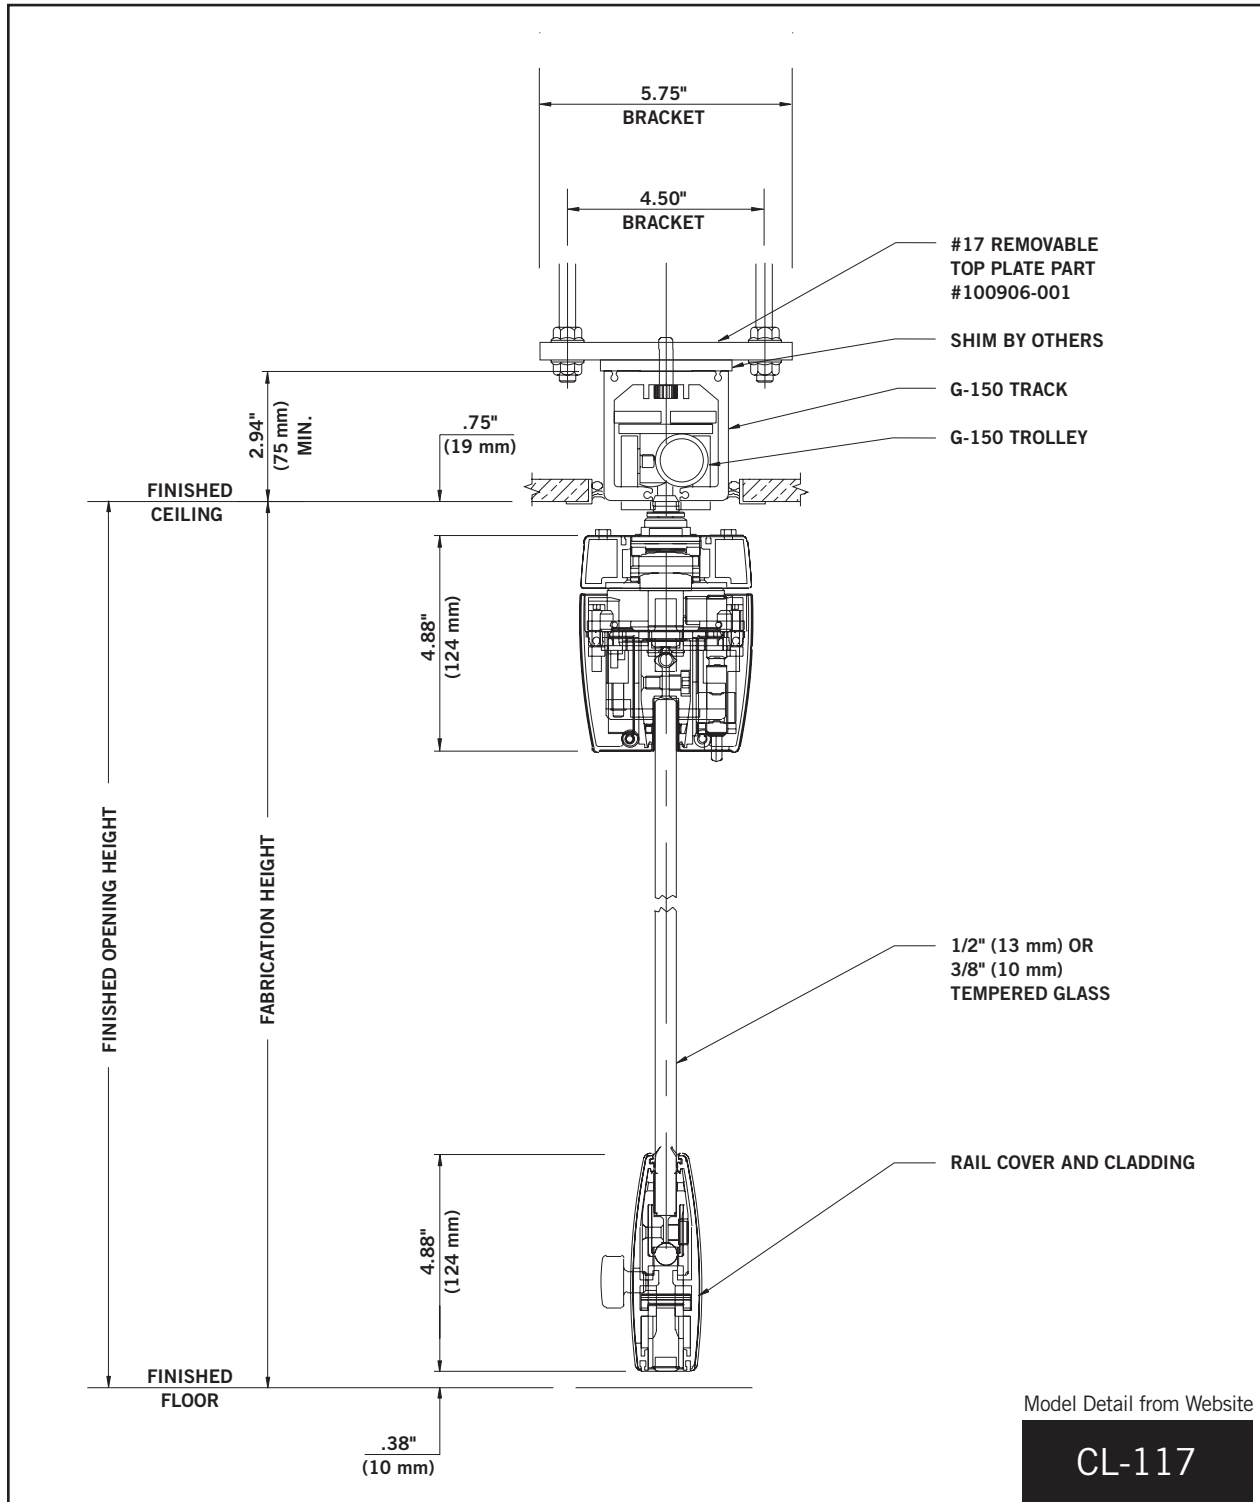


Model Detail from Website


CL-117

MOVEABLE GLASS WALL TECHNICAL DATA PANEL DETAILS – STACKING CONFIGURATIONS

Pivot Panel Closure 90° Side Stack

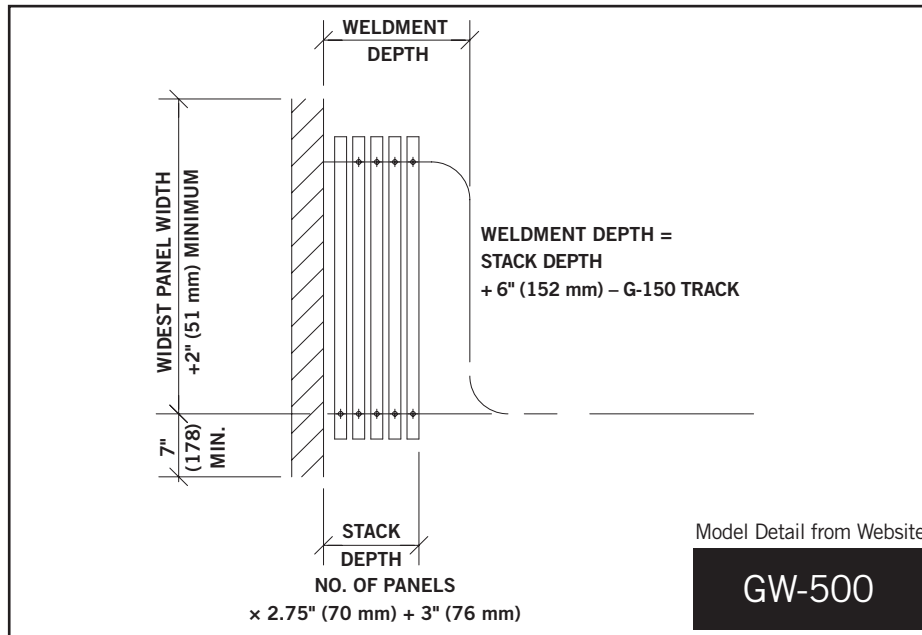


Intermediate Panel Closure 90° Side Stack (Remote)

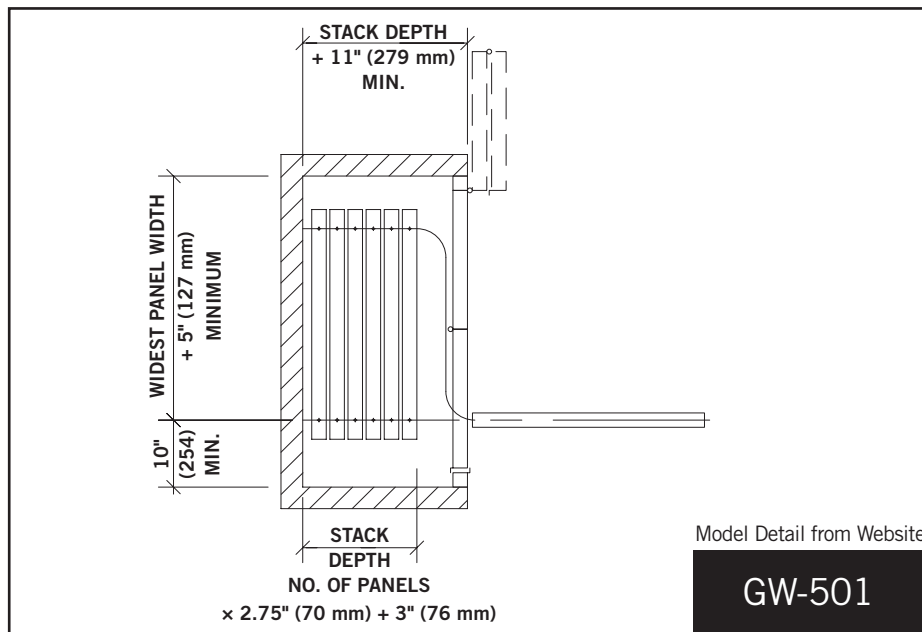


MOVEABLE GLASS WALL TECHNICAL DATA PANEL DETAILS – STACKING CONFIGURATIONS

Intermediate Panel Closure Parallel Side Stack (Remote)

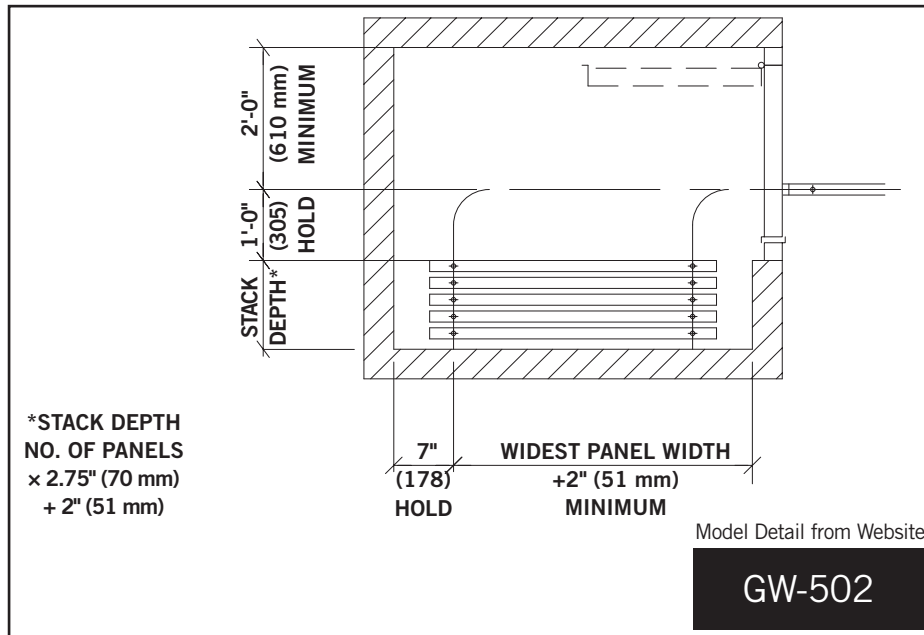


Intermediate Panel Closure 135° Side Stack (Remote)

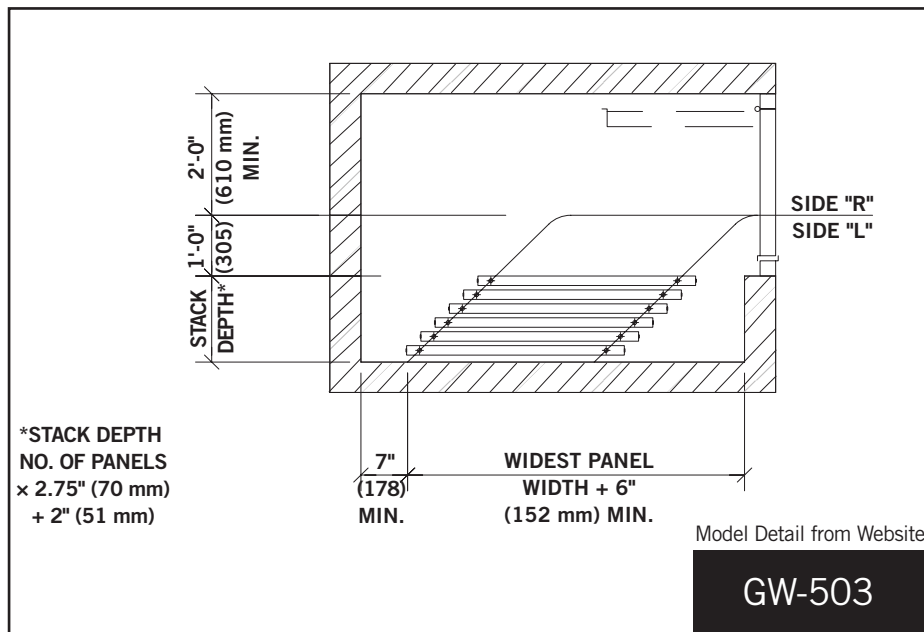


MOVEABLE GLASS WALL TECHNICAL DATA PIVOT PANEL/PASS DOOR HARDWARE OPTIONS

12" (305 mm) Door Pull (Back to Back)

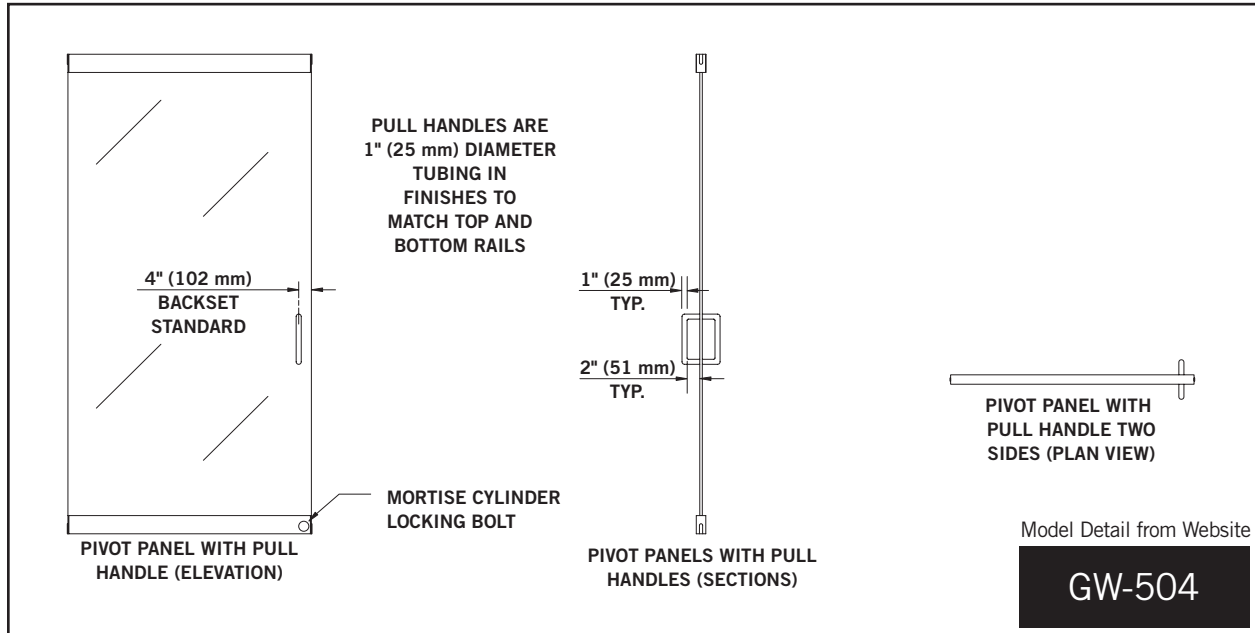


48.81" (1240 mm) Ladder Pull (Back to Back)

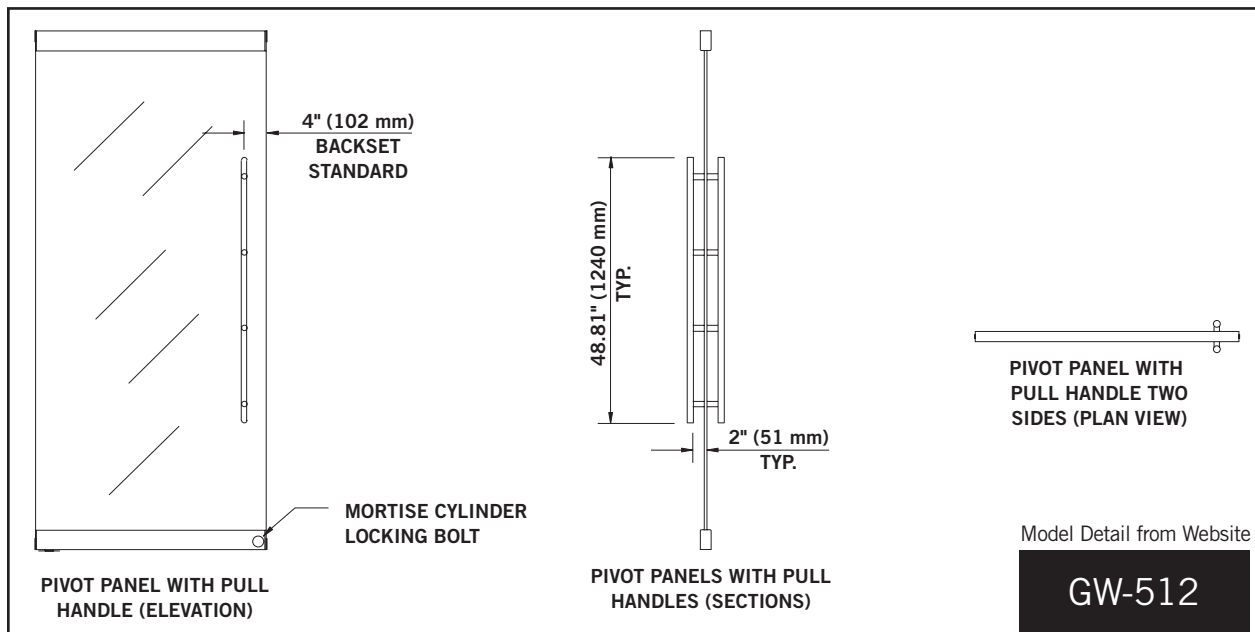


MOVEABLE GLASS WALL TECHNICAL DATA HARDWARE OPTIONS – MODEL COMPACTLINE FULLY FRAMED


Edge Trim

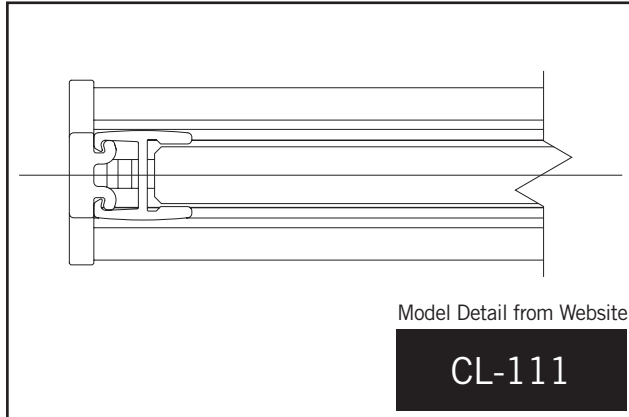


Pivot Interface

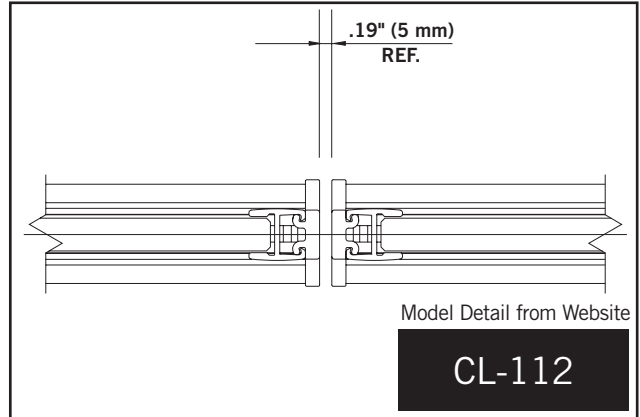


Panel Interface

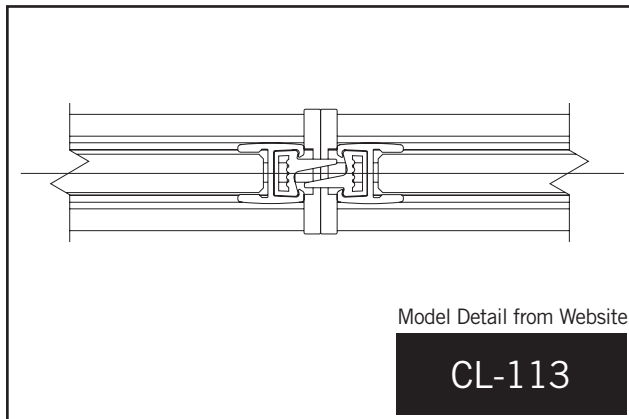

Corner Post

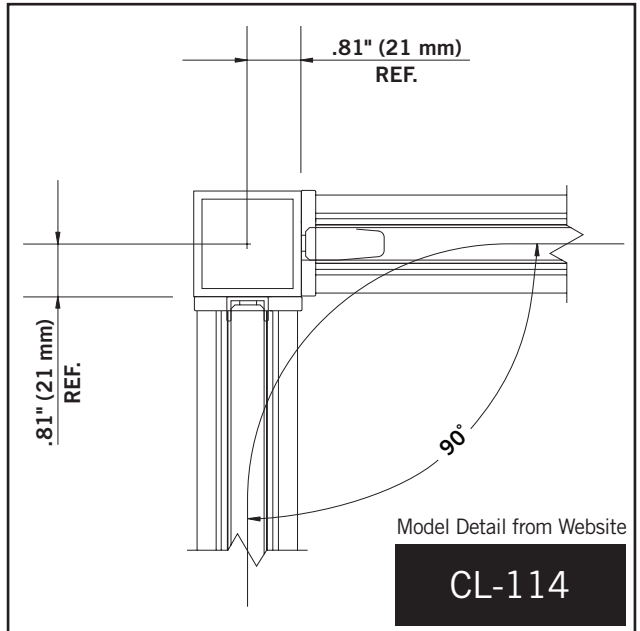


Angular Meeting

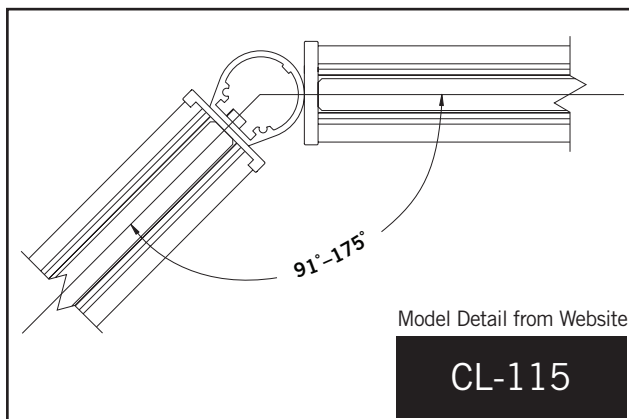


MOVEABLE GLASS WALL TECHNICAL DATA HARDWARE OPTIONS


Interconnecting Floor Bolt

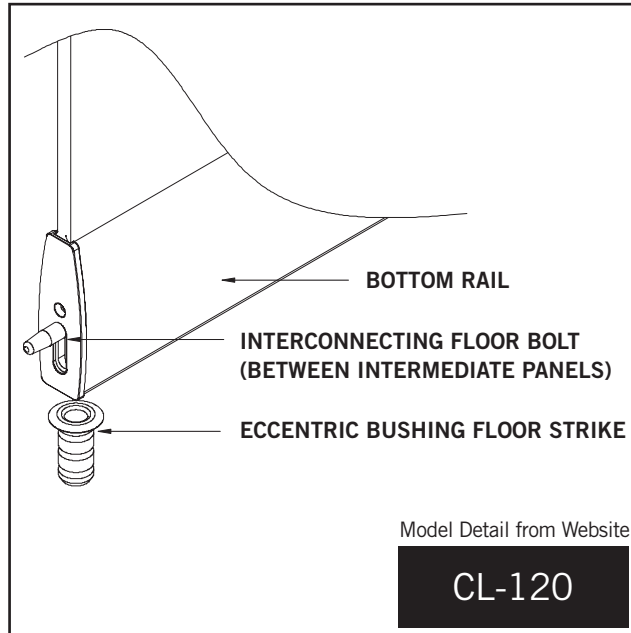


Mortise Cylinder Locking Bolt (Thumb Turn)

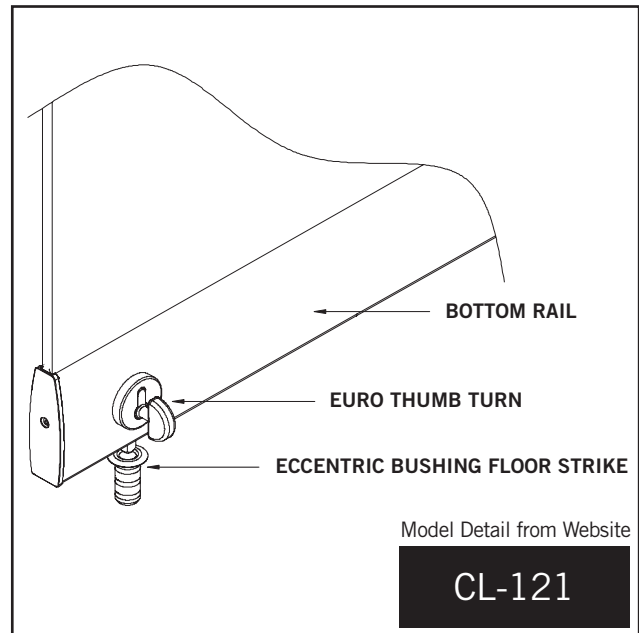

Mortise Cylinder Locking Bolt (Keyed)

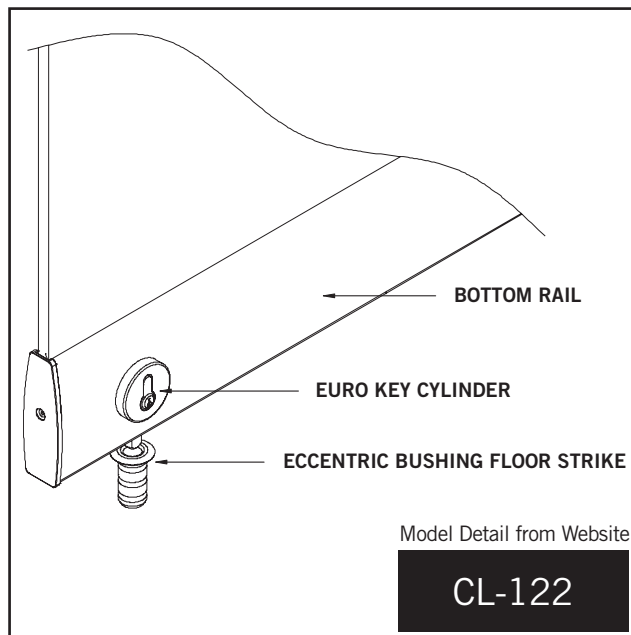


Face-Mounted Locking Bolt

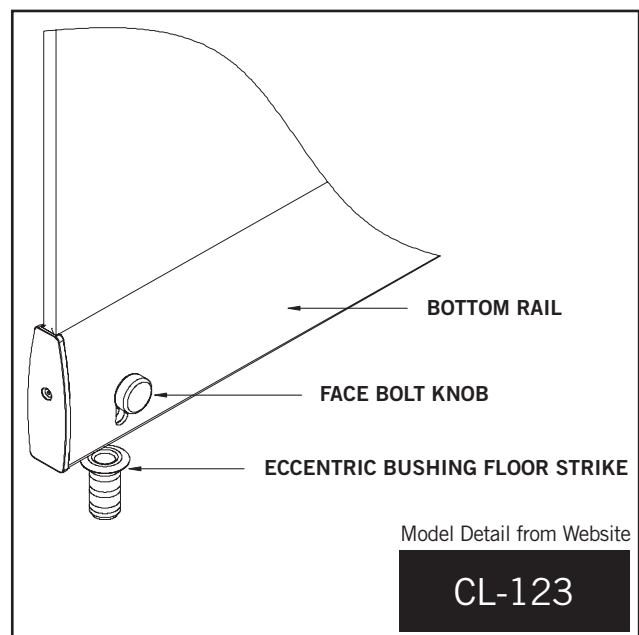


MOVEABLE GLASS WALL TECHNICAL DATA HARDWARE OPTIONS

BTS80 Door Closer

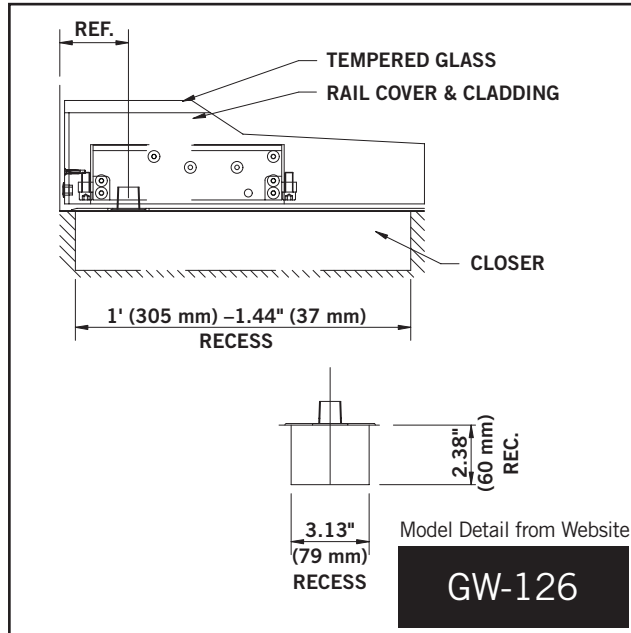

Floor Strike for Floor Bolts (Eccentric Bushing)

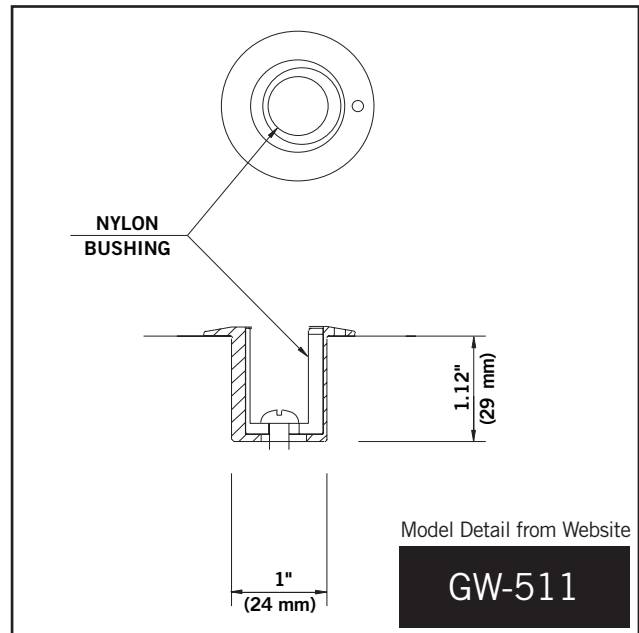

Modernfold, Inc.
215 West New Road
Greenfield, IN 46140

Toll Free: 800.869.9685

email: info@modernfold.com
www.modernfold.com

A DORMA Group Company
www.dorma-usa.com

Form No. 2526 10/12

Manufacturer reserves the right to change design or specifications at any time without notice.
Please contact your local Modernfold distributor for further assistance, or visit our website at www.modernfold.com.

